

IT

Indirect calorifier

IT - 300/400/500/600/750/1000

IT - 1500/2000/2500/3000

- Indirect water heater (calorifier) for a wide range of applications
- Single-wall spiral heat exchanger
- PermaGlas Ultra Coat
- second-generation glass coating technology prevents corrosion
- Insulated ring base
- Insulated access cover for comprehensive waterside maintenance
- Replaceable magnesium anode
- Options: Flexible magnesium anode for installation in confined areas
- Powered anode for reduced maintenance requirements
- Temperature and pressure valve with stainless steel spring set to 95°C and a maximum water pressure of (10 bar) 1000 kPa
- Analogue temperature gauge (0-120°C)
- Electric element heat packs (3 - 36 kW)
- Optional ancillaries: unvented kits
- Destratification pump kit



Technical specifications


		IT 300	IT 400	IT 500	IT 600	IT 750	IT 1000	IT 1500	IT 2000	IT 2500	IT 3000
Technical data											
Output coil	kW	52	78	100	104	112	145	147	147	156	156
Surface area coil	m²	1,64	2,45	3,11	3,45	3,72	4,82	5,20	5,20	6,00	6,00
Water capacity coil	l	9,9	14,8	18,8	29,3	31,6	40,9	40,0	40,0	45,0	45,0
Flow rate coil (80-60°C)	l/h	2236	3354	4300	4472	4816	6235	6485	6485	6871	6871
Pressure drop coil	mbar	78	244	489	104	128	259	830	830	695	695
Maximum working pressure tank	kPa (bar)	1000(10)	1000(10)	1000(10)	1000(10)	1000(10)	1000(10)	700(7)	700(7)	700(7)	700(7)
Maximum working pressure coil	kPa (bar)	1600(16)	1600(16)	1600(16)	1600(16)	1600(16)	1600(16)	600(6)	600(6)	600(6)	600(6)
Maximum operating temperature tank	°C	95	95	95	95	95	95	85	85	85	85
Maximum operating temperature coil	°C	110	110	110	110	110	110	90	90	90	90
Draw-off capacity											
(T _k oud = 10°C / T _{set} = 60°C)											
Storage capacity	l	300	385	473	643	725	1007	1550	1800	2550	2800
30 min. ΔT=44°C	l	831	1176	1482	1733	1908	2557	3266	3584	4618	4936
60 min. ΔT=44°C	l	1281	1938	2459	2749	3002	3974	4702	5020	6142	6460
90 min. ΔT=44°C	l	1730	2701	3436	3766	4097	5391	6139	6457	7667	7985
120 min. ΔT=44°C	l	2180	3463	4413	4782	5192	6808	7575	7894	9191	9509
Continuous ΔT=44°C	l/h	899	1525	1955	2033	2189	2834	2873	2873	3049	3049
Heating-up time ΔT=44°C	min.	20	15	15	19	20	21	32	38	50	55
30 min. ΔT=50°C	l	732	1035	1304	1525	1679	2250	2874	3154	4063	4343
60 min. ΔT=50°C	l	1127	1706	2164	2420	2642	3497	4138	4418	5405	5685
90 min. ΔT=50°C	l	1523	2377	3024	3314	3605	4744	5402	5682	6747	7027
120 min. ΔT=50°C	l	1918	3047	3884	4208	4569	5991	6666	6946	8088	8368
Continuous ΔT=50°C	l/h	791	1342	1720	1789	1926	2494	2538	2528	2683	2683
Heating-up time ΔT=50°C	min.	23	17	16	22	23	24	37	43	57	63
Shipping data											
Weight empty	kg	103	139	180	241	254	336	398	426	576	600
Maximum weight	kg	399	524	653	884	979	1343	1948	2226	3126	3400
Weight incl. packaging + jacket	kg	125	153	201	251	260	348	488	526	686	720
Width packaging	mm	780	780	780	870	870	1010	1170	1170	1498	1498
Height packaging	mm	1510	1850	2150	1930	2150	2100	2060	2248	2120	2195
Depth packaging	mm	780	780	780	870	870	1010	1426	1426	1680	1680

Ecodesign specifications

		IT 300	IT 400	IT 500	IT 600	IT 750	IT 1000	IT 1500	IT 2000	IT 2500	IT 3000
Load Profil	-	C	C	C	-	-	-	-	-	-	-
Standby loss	W	100	100	104	126	126	146	154	171	232	243


Dimensions

IT 300-1000

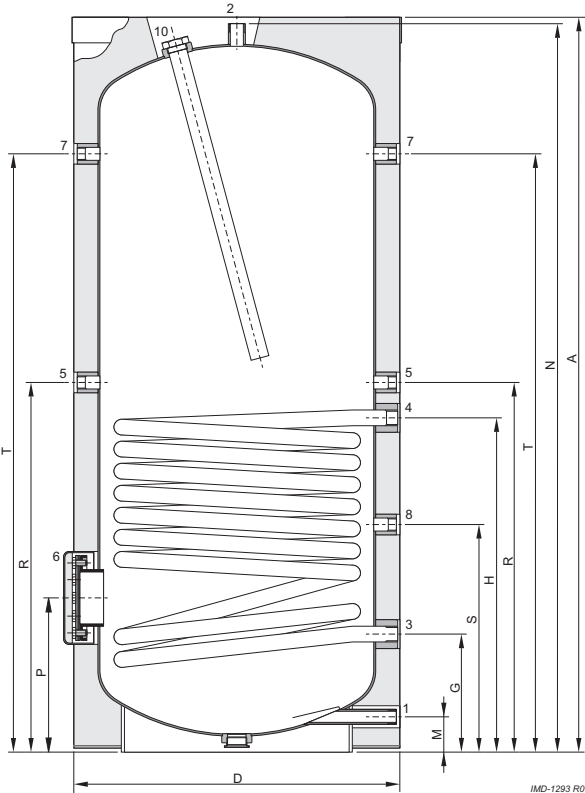

			IT 300	IT 400	IT 500	IT 600	IT 750	IT 1000
A	Total height	mm	1375	1710	2045	1840	2035	2005
D	Diameter (without insulation)	mm	600	600	600	750	750	900
	Diameter (with insulation)	mm	740	740	760	910	930	1100
G	Height heat exchanger outlet	mm	775	260	260	310	310	350
H	Height heat exchanger inlet	mm	1015	1015	1205	1150	1210	1310
M	Height cold water inlet	mm	70	70	70	85	85	95
N	Height warm water outlet	mm	1320	1655	1995	1805	2000	1965
P	Height inspection opening	mm	330	330	330	420	420	450
R	Height connection circulation	mm	860	1100	1290	1240	1300	1400
S	Height immersion well	mm	500	500	500	655	655	705
T	Height T&P connection	mm	1030	1365	1700	1480	1675	1605
1	Cold water inlet	-	R 1½"	R 1½"	R 1½"	R 1½"	R 1½"	R 1½"
2	Warm water outlet	-	R 1½"	R 1½"	R 1½"	R 1½"	R 1½"	R 1½"
3	Heat exchanger outlet	-	Rp 1"	Rp 1"	Rp 1"	Rp 1¼"	Rp 1¼"	Rp 1¼"
4	Heat exchanger inlet	-	Rp 1"	Rp 1"	Rp 1"	Rp 1¼"	Rp 1¼"	Rp 1¼"
5	Connection circulation	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
6	Diameter inspection opening	mm	115	115	115	180	180	180
7	T&P connection	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
8	Immersion well	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
10	Anode connection	-	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"


IT 1500-3000

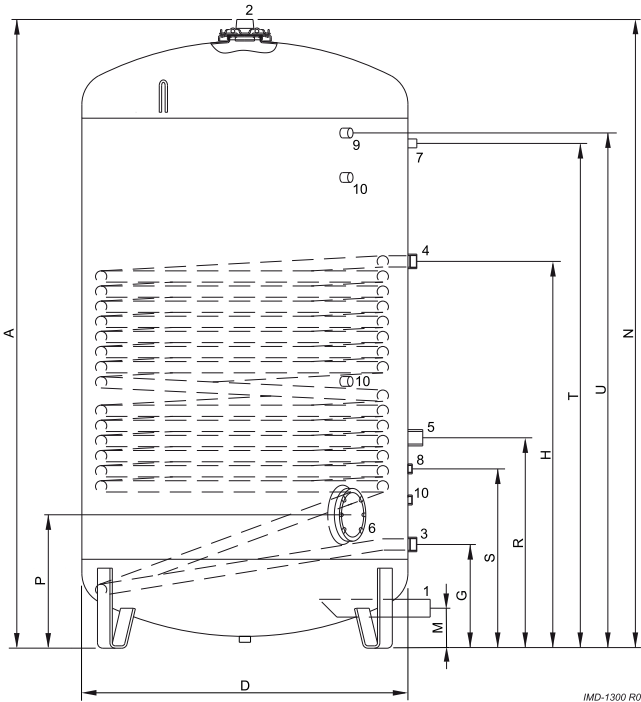

			IT 1500	IT 2000	IT 2500	IT 3000
A	Total height	mm	1985	2175	2045	2070
D	Diameter (without insulation)	mm	1100	1100	1400	1400
	Diameter (with insulation)	mm	1300	1300	1600	1600
G	Height heat exchanger outlet	mm	350	350	430	430
H	Height heat exchanger inlet	mm	1305	1305	1285	1285
M	Height cold water inlet	mm	135	135	185	185
N	Height warm water outlet	mm	1985	2175	2045	2070
P	Height inspection opening	mm	450	450	530	530
R	Height connection circulation	mm	710	710	790	790
S	Height immersion well	mm	605	605	685	685
T	Height T&P connection	mm	1515	1705	1530	1625
U	Height connection top tank temp. sensor	mm	1550	1740	1530	1660
1	Cold water inlet	-	R 2"	R 2"	R 2"	R 2"
2	Warm water outlet	-	R 2"	R 2"	R 2"	R 2"
3	Heat exchanger outlet	-	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"
4	Heat exchanger inlet	-	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"
5	Connection circulation	-	Rp 1¼"	Rp 1¼"	Rp 1¼"	Rp 1¼"
6	Diameter inspection opening	mm	110	110	110	110
7	T&P connection	-	Rp 2"	Rp 2"	Rp 2"	Rp 2"
8	Immersion well	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
9	Connection top tank temp. sensor	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
10	Anode connection	-	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"

Installation diagrams

IT 300-1000

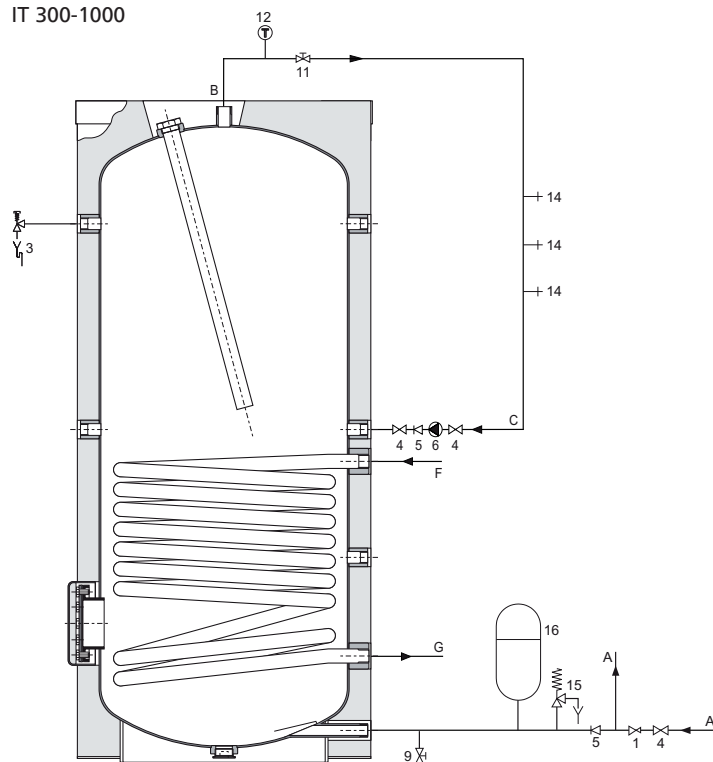

IMD-0449 R2

- 1 pressure relief valve
(mandatory if mains water pressure is too high)
- 2 inlet combination
- 3 T&P-valve
- 4 stop valve (recommended)
- 5 non-return valve (mandatory)
- 6 circulation pump (optional)
- 9 drain valve
- 11 service stop valve
- 12 temperature gauge (optional)
- 14 draw-off points
- 15 expansion valve (mandatory)
- 16 expansion vessel (mandatory)


- A cold water supply
- B hot water supply
- C circulation pipe
- F inlet heat exchanger
- G outlet heat exchanger

In the instruction manual you will find all the necessary information regarding connection, installation and maintenance of the product; including information on the electrical connections.

Information regarding the recycling or disposal of the product can also be found in the manual. This manual is delivered with the appliance and can also be found on our website; www.aosmithinternational.com.

Installation diagrams

IT 300-1000

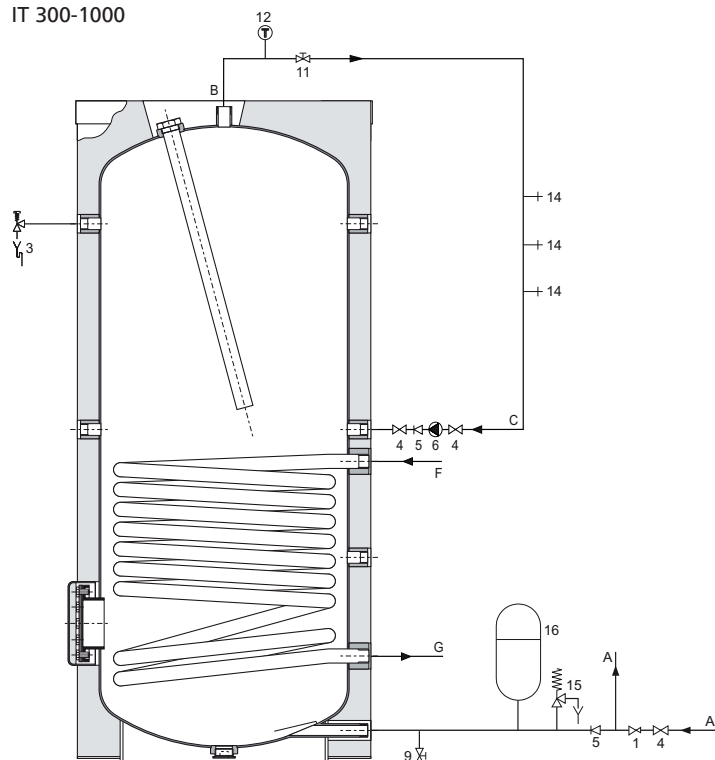

- 1 pressure relief valve
(mandatory if mains water pressure is too high)
- 2 inlet combination
- 3 T&P-valve
- 4 stop valve (recommended)
- 5 non-return valve (mandatory)
- 6 circulation pump (optional)
- 9 drain valve
- 11 service stop valve
- 12 temperature gauge (optional)
- 14 draw-off points
- 15 expansion valve (mandatory)
- 16 expansion vessel (mandatory)

A cold water supply
 B hot water supply
 C circulation pipe
 F inlet heat exchanger
 G outlet heat exchanger

The IT 1500-3000 is also available in vented version.

In the instruction manual you will find all the necessary information regarding connection, installation and maintenance of the product; including information on the electrical connections.

Information regarding the recycling or disposal of the product can also be found in the manual. This manual is delivered with the appliance and can also be found on our website; www.aosmithinternational.com.

IT 1500-3000

